
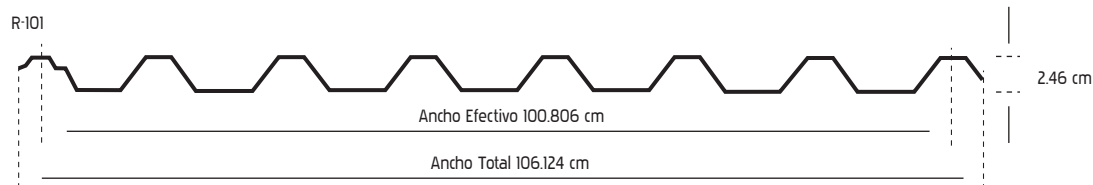


R-72 y R-101

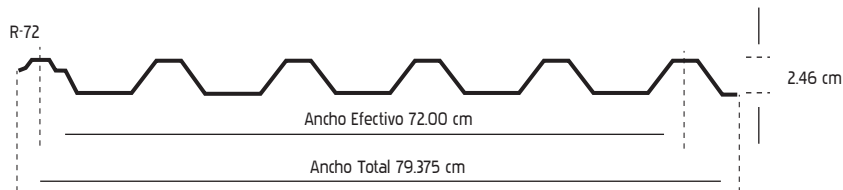

Propiedades de la Sección									ACCIONES PERMISIBLES		
CALIBRE	PESO (Kg/m ²)		COMPRESIÓN SUPERIOR (MOMENTO POSITIVO)			COMPRESIÓN INFERIOR (MOMENTO NEGATIVO)			VA MAX kg/m	REACCIÓN MÁXIMA	
	R-72	R-101	I ⁺ (cm ⁴ /m)	S ⁺ (cm ⁴ /m)	MMAX ⁺ (kg/m)	I ⁻ (cm ⁴ /m)	S ⁻ (cm ⁴ /m)	MMAX ⁻ (kg/m)		APOYO EXTERIOR kg/m	APOYO INTERIOR kg/m
			R-72	R-101	I ⁺ (cm ⁴ /m)	S ⁺ (cm ⁴ /m)	MMAX ⁺ (kg/m)	I ⁻ (cm ⁴ /m)		S ⁻ (cm ⁴ /m)	MMAX ⁻ (kg/m)
30	339		290	173	26.98	2.02	156	24.34	742	147	181
28	412	392	393	241	37.60	2.66	211	32.92	1279	208	330
26	4.89	4.64	4.93	3.07	47.89	3.38	2.73	42.59	1846	279	515
24	5.64	5.36	5.81	3.65	56.94	4.14	3.25	50.70	2372	359	731
22	7.91	7.52	8.33	5.34	83.30	6.78	4.90	76.44	3393	680	1557

Capacidad de Carga Admisible (kg/m ²) (Uniformemente Distribuida)																	
CONDICIÓN DE APOYO	CALIBRE	* SEP. MAX. m	SEPARACIÓN ENTRE APOYOS (m)														
			CARGA VIVA							SUCCIÓN DE VIENTO**							
			1.00	1.20	1.40	1.60	1.80	2.00	2.20	1.00	1.20	1.40	1.60	1.80	2.00	2.20	
SIMPLE 	30		213	147	107						258	179	132	101	80		
	28		297	205	149	113					350	243	178	137	108		
	26	1.15	378	261	191	145	108				453	314	231	177	140	113	
	24	1.35		311	227	172	135	92			539	374	275	210	166	135	111
	22	1.90		326	248	184	132	97			621	564	414	317	251	203	138
DOBLE 	30		191	132	96						287	199	146	112			
	28	1.10	259	179	130	99					399	277	204	156	123	100	
	26	1.45	336	232	169	128	100				508	353	259	199	157	127	105
	24	1.70		276	201	153	120	96			603	419	308	236	187	151	125
	22	2.20		304	231	181	145	118			578	578	452	339	268	217	179
TRIPLE 	30		240	166	121						358	249	183	140			
	28	1.10	325	224	164	124					500	347	255	195			
	26	1.45		291	212	161	127	101			636	442	324	248	196	159	131
	24	1.70		346	253	192	151	121	99			525	386	296	233	189	156
	22	2.20		382	291	228	183	150				565	565	424	335	271	224
CUATRO O MÁS 	30		223	154	112						334	232	171	131			
	28	1.10	303	209	152	116					463	324	238	182	144		
	26	1.45	395	271	198	150	118	94			590	412	303	232	183	148	123
	24	1.70		322	235	179	140	112			707	487	360	276	218	176	146
	22	2.20		356	270	212	170	139				524	524	396	313	253	209